

BABY LOCK SEWING ACCESSORIES

Rolled Hem Foot

(BLQP-RH)


Instructions

This foot is perfect for hems that are too small to sew by hand. It automatically curves under a 3mm double hem while stitching with a straight stitch. This foot includes a built-in shank and works best on blouses, gowns and other projects with lightweight fabric.

INSTRUCTIONS:

1. Remove the presser foot and raise the needle to the highest position.


2. Loosen and remove screw using the screwdriver included with your machine.

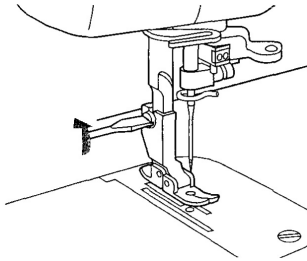


3. Attach rolled hem foot and tighten the screw.

4. Insert needle approximately 0.5 cm from the edge of the fabric and sew 2 stitches.


5. Turn the handwheel toward you to raise the needle, raise the presser foot, then pull the fabric forward.

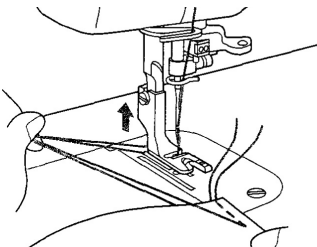

6. Hold the 4 threads in your left hand.


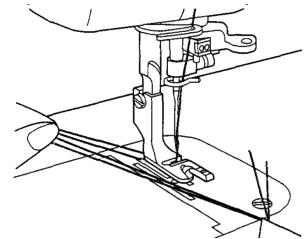


7. With your right hand, put the edge of the rolled hem under the presser foot from the spot where the threads come out. Insert the edge so that it lies directly under the needle. Lower the presser foot.

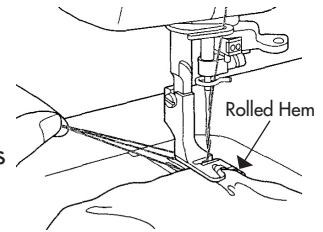

8. Pull gently on threads in left hand while sewing the first 3-4 stitches to hold them in place.

9. Fold hem over about 0.5 cm and continue feeding folded hem under foot while sewing towards the curved guide on the foot.

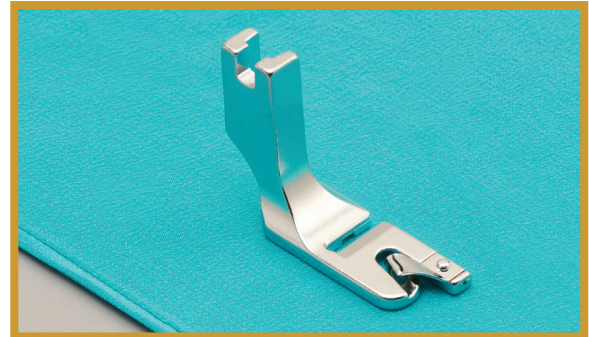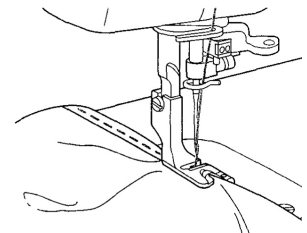

FOR THE LOVE OF SEWING